



Shenzhen HSC Electronics Co.,Ltd

4 Sided LED Pillar





Product Size: 340×340×1120mm
Screen Size: 320×640mm×4

P2 Model

Resolution: 160×320×4 Pixel

P1.8 Model

Resolution: 172×344×4 Pixel

P1.5 Model

Resolution: 208×416×4 Pixel

P1.25 Model

Resolution: 256×512×4 Pixel





| Product Name | 4-Sided LED Pillar | | | |
|---------------------------|----------------------|-----------------|-----------------|-----------------|
| Model | P2 | P1.8 | P1.5 | P1.25 |
| Pixel Pitch | 2mm | 1.8mm | 1.5mm | 1.25mm |
| Pixel Configuration | SMD1515 | SMD1515 | SMD1212 | SMD1010 |
| Module Size | 320*160mm | | | |
| Module Resolution | 160*80 Pixel | 172*86 Pixel | 208*104 Pixel | 256*128 Pixel |
| Screen Size | 320*640mm*4 | | | |
| Screen Resolution | 160*320*4 Pixel | 172*344*4 Pixel | 208*416*4 Pixel | 256*512*4 Pixel |
| Overall Size | 340*340*1120mm | | | |
| Cabinet Material | Iron | | | |
| Screen Weight | 25kg | | | |
| Max Power Consumption | 320W | | | |
| Average Power Consumption | 128W | | | |
| Brightness | 800-1000nits | | | |
| Refresh Rate | 3840hz | | | |
| Expected Lifetime | 100,000 Hrs | | | |
| Operating Temp/Humidity | -20°C-50°C / 10%-90% | | | |
| Servicing | Front | | | |
| IP Rating | IP43 | | | |
| Control method | WIFI/4G (optional) | | | |



Single-Sided LED Pillar



Single Unit(320×960mm)



Two Units(640×960mm)




Three Units(960×960mm)



Key Features:

1. 2mm or higher resolution & quality
2. 4-sided design, wide viewing angle
3. Floor-standing application, no need installation
4. Plug & Play Solution
5. Customized size is available
6. WiFi control via computer software and App

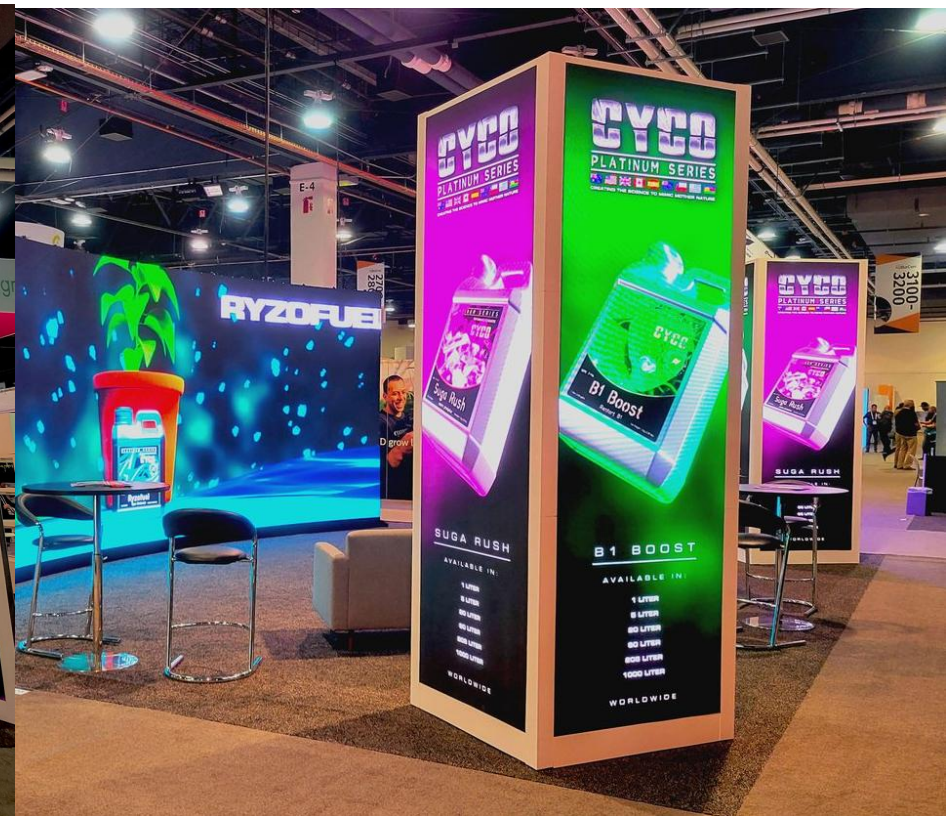



Round 4-Sided LED Pillar

Screen Size: 320×960mm×4



P1.8 Model:

Resolution: 688×516 Pixel

P2 Model:

Resolution: 640×480 Pixel

P2.5 Model:

Resolution: 512×384 Pixel





| Product Name | Round 4-Sided LED Pillar | | |
|---------------------------|--------------------------|---------------|---------------|
| Model | P2.5 | P2 | P1.8 |
| Pixel Pitch | 2.5mm | 2mm | 1.8mm |
| Pixel Configuration | SMD2121 | SMD1515 | SMD1515 |
| Module Size | 320*160mm | | |
| Module Resolution | 128*64 Pixel | 160*80 Pixel | 172*86 Pixel |
| Screen Size | 320*960mm*4 | | |
| Screen Resolution | 512*384 Pixel | 640*480 Pixel | 688*516 Pixel |
| Overall Size | 320*320*1650mm | | |
| Cabinet Material | Iron | | |
| Screen Weight | 35kg | | |
| Max Power Consumption | 480W | | |
| Average Power Consumption | 160W | | |
| Brightness | 800-1000nits | | |
| Refresh Rate | 3840hz | | |
| Expected Lifetime | 100,000 Hrs | | |
| Operating Temp/Humidity | -20°C-50°C / 10%-90% | | |
| Servicing | Front | | |
| IP Rating | IP43 | | |
| Control method | WIFI/4G (optional) | | |